

MANFORDA[®] M-AFFLUX[®] GX81 UF

Open Module Design

Product Technical Characteristics

The GX series features an innovative PES hollow fiber membrane filament resistance technology:


- Optimized physical strength and antioxidant capacity
- Stable filtration performance
- It has a high removal rate of colloidal particles, bacteria and viruses
- Easy to clean and restore performance
- Open design, easy installation, low maintenance cost, and can be matched with the existing racks at the customer's site
- Excellent penetration performance and long service life

Main Application Fields

- Industrial process water treatment
- Reuse of industrial wastewater
- Municipal sewage treatment
- Pretreatment of reverse osmosis
- Boiler water treatment
- Cooling water treatment
- Wastewater treatment
- Reclaimed water reuse
- Zero discharge of liquid
- Desalination of seawater
- High-salt wastewater

Technical Specifications Of Membrane Modules

Filtering Method	Inside-out	
Membrane Type	Hollow Fiber	
Membrane Material	PES	
Nominal Membrane Pore Size	0.02um	
Membrane Module Operation Mode	Full-Flow /Cross-Flow	
Other Wetting Module Components	PU, uPVC, EPDM, ABS	
Effective Membrane Area	81m ²	871.8ft ²
Total Length(L1)	2360+3.0mm	92.3+0.1inch
Length(L2)	1829+1.5mm	72+0.1inch
Length(L3)	2000+1.5mm	78.7+0.1inch
Membrane Module Diameter(D)	273mm	10.8inch
Width(A)	188mm	7.1inch
Width(C)	305mm	12inch
Feed/Filtrate Interface	51mm	2.0inch
Transportation Weight	77kg	134lbs.
Empty Weight	77kg	134lbs.
Full Water Weight	145kg	220lbs.
Water Filling Volume	33L	8.7gal

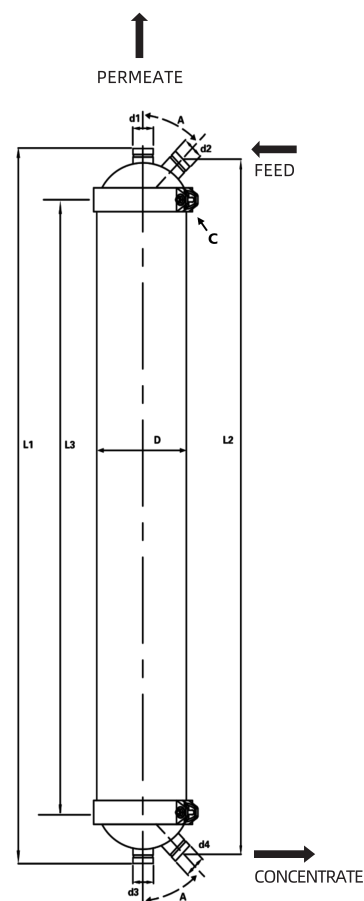

Operating Technical Conditions

Parameters	Numerical Value	
Operating Temperature Range	1-40°C	34-104°F
Run pH	2-11	
Cleaning pH	2-12	
RUN TMP	0.1-0.6 bar	1.5-8.7 psi
BW TMP	0.3 -2.0 bar	4.4-29.0 psi
BW Method	Water Bw	
BW Flux	230 L/(m ² h)	135 gfd
BW Flow	18.63m ³ /h	82gpm
Rate Temperature Change	5 °C/min	9 °F/min
Max. Inlet Water	6.25 bar (at 20 °C)	90.7 psi
Max Filter TMP	1.5 bar	22psi
BW FlowTMP	3.0 bar	44 psi
Max. Flux	180 L/(m ² h)	106 gfd
Max. Fluw	14.58m ³ /h	50.6gpm
Max. BW Flux	300 L/(m ² h)	176 gfd
Max. SIZE	300 µm	
Max. NaOCL	≤250,000 ppm xh (at pH≥10)	
Max. NaOCL CO	500 ppm	

General Information

- Once the membrane element is wetted, it should always remain moist
- If the user does not strictly follow the operation limits and guidelines set in this specification, the limited warranty will become invalid
- When the system is shut down for a long time, to prevent the growth of microorganisms, it is recommended to immerse the membrane elements in a protective solution
- Users shall be fully responsible for the impact on components caused by the use of incompatible chemicals and lubricants At all times, water shock/air hammer should be avoided during the storage of membrane elements
- For more information or if you have any questions, please contact MANFORDA

Membrane Element Storage

- The new membrane modules can be stored either as supplied or in their original packaging.
- The membrane module contains a water preservation solution of glycerol (20wt%) and sodium sulfite (1wt%) to prevent dehydration and control bacterial growth. The membrane module is packaged in a vacuum-sealed plastic bag to maintain the moisture inside the module. Components should be stored in a dry, well-ventilated place, away from fire sources and direct sunlight. The storage temperature should be between 0 and 40°C. At all times, comply with MANFORDA's instructions on transportation and storage, and can be provided upon request. It is recommended to install the membrane module into use as soon as possible.
- The storage period of the membrane is up to 48 months, calculated from the date when the component is announced to be ready for delivery to the MANFORDA warehouse. All guarantee letters are invalid after the expiration of the shelf life.
- For detailed information, please refer to the MANFORDA warranty document.